


## DEKA


The DEKA luminaire provides a practical solution for all inground lighting applications including pathways, driveways, courtyards and decks. Utilising a solid brass CNC machined external fascia plate and a 6063 graded aluminium in a black anodised finish. The DEKA recessed inground luminaire in solid brass finish will age with time. This is a natural process which adds to the overall appeal of the fixture. A polycarbonate housing is provided for concrete applications. For installations in which do not require the polycarbonate housing such as timber decks the stainless steel spring clips offer a secure fit. Idea applications would also include up lighting trees, feature garden wall, external house fascia etc.

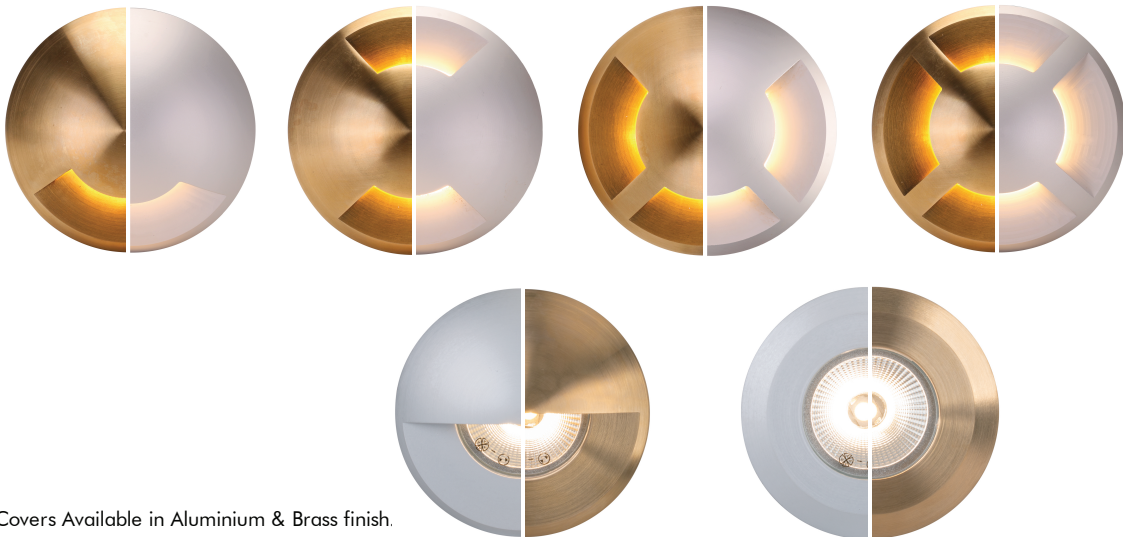

Covers Available in Aluminium & Brass finish.

<b>Input Voltage</b>	12V DC
<b>Requirements</b>	12V DC Constant Voltage LED Driver required - Wire in Parallel
<b>Power</b>	3W
<b>IP Rating</b>	IP65
<b>LED Type</b>	COB
<b>Lumens</b>	Warm White 3000K - 300lm White 5000K - 350lm
<b>CCT</b>	3000K - 5000K
<b>CRI</b>	≥83
<b>Beam Angle</b>	60°
<b>Dimmable</b>	No
<b>Lifespan</b>	50,000hrs
<b>Cutout</b>	Ø77mm
<b>Drive over</b>	2000kgs (19438, 19440)

### 1,2,3,4 Way & Eyelid

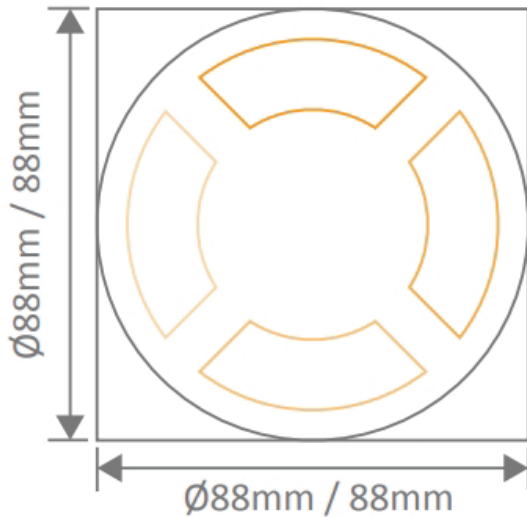

Structure	Cover Colour	Code DEKA-COVER-
One-Way Cover	Aluminium	1-W 19428
	Brass	1-W 19442
Two-Way Cover	Aluminium	2-W 19430
	Brass	2-W 19444
Three-Way Cover	Aluminium	3-W 19432
	Brass	3-W 19446
Four-Way Cover	Aluminium	4-W 19434
	Brass	4-W 19450
Eyelid Cover	Aluminium	ELID 19436
	Brass	ELID 19450
Round Cover	Aluminium	RND 19424
	Brass	RND 19438