


DRIVE SHP305 - 70/180W

70 - 180 watt, IP66 LED street luminaire, IK08 rated



Application	A decorative, streamline exterior commercial solution					
Colour	Black					
Material	Stylish die-cast aluminium body, durable powder coated finish, clear tempered glass diffuser					
Light Distribution	Asymmetrical light distribution (TYPE II) fitted, 0% upward light ratio					
Mounting	Standard 3G.ANSI C.136.31-2010 Ø 60 pole mounting bracket, 800 mm 3 core rubber flex					
Dimmable	Optional					
Dimmer Type	1-10V DC					
In Built Sensor	Optional					
IP Rating	IP66					
IK Rating	IK08					
Input Voltage	240V					
CRI	70					
Length	763mm					
Width	352mm					
Height	167mm					

Power (W)	70	90	90	120	150	180
Lumens (lm)	9100	11700	10800	15600	19500	23400
CCT (K)	5000	5000	4000	5000	5000	5000

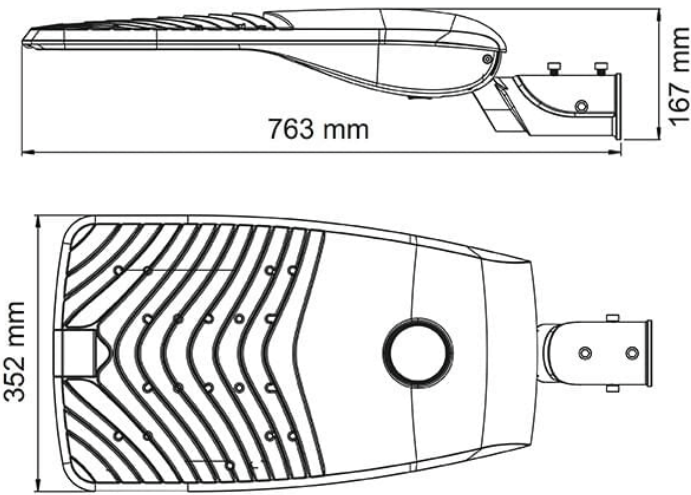

Code	Power (W)	Lumens (lm)
SHP305/70NDL/BK	70	9100
SHP305/90NDL/BK	90	11700
SHP305/90CWL/BK	90	10800
SHP305/120NDL/BK	120	15600
SHP305/150NDL/BK	150	19500
SHP305/180NDL/BK	180	23400