


FLEXI STREAMLINE 24V SINGLE COLOUR CRI90 FLLB2410/SS - 10W/m

Roll length 15m, maximum run length 15m, 10W/m, 10mm width strip, IP65, COB, CRI90

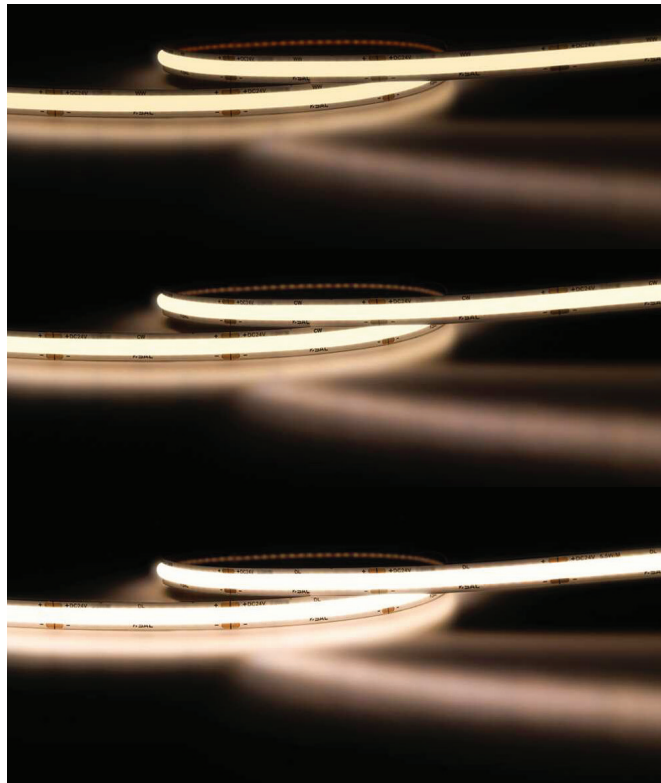

Application	Perfect for the home or commercial fit-outs
Dimmable	Optional
Dimmer Type	Options: Type A - Trailing edge dimming, Type B - LED strip controller LT8915DIM/BT with LT8914DIM/RP if required, Type C - Analogue 1-10V Type D - DALI 2 control
Requirements	Heat sink required for system performance

IP Rating	IP65		
Input Voltage	24V		
Watts per metre	10W/m		
Beam Angle	140°		
LED's per metre	396		
CRI	90		
Cutting Interval	45mm		
Dimensions (mm)	10(W) x 2(H)		
CCT (K)	3000	4000	6500
Lumens per metre (lm/m)	735	800	840

Code	CCT (K)
FLLB2410/WW/SS	3000
FLLB2410/CW/SS	4000
FLLB2410/DL/SS	6500