


FRISBEE SL2104TC - 8W/25W

Low profile, recessed or surface mount oyster with selectable CCT and dual power, IP44.



Application	A creative design for residential or commercial spaces		
Colour	White		
Material	Durable white polyamide body profile with an opal polycarbonate diffuser		
Mount	Low profile design, ceiling mount		
Dimmable	No		
Electrical Protection	Double Insulated		
IP Rating	IP44		
Input Voltage	240V		
CCT	3000/4000/6000K		
CRI	80		
Beam Angle	110°		
Multiple Wattage (W)	8/12	12/18	18/25
Lumens (lm)	780/840/840	1260/1350/1350	1875/2000/2000
Diameter (mm)	180	220	300
Dimensions (mm)	21(H)	21(H)	25(H)

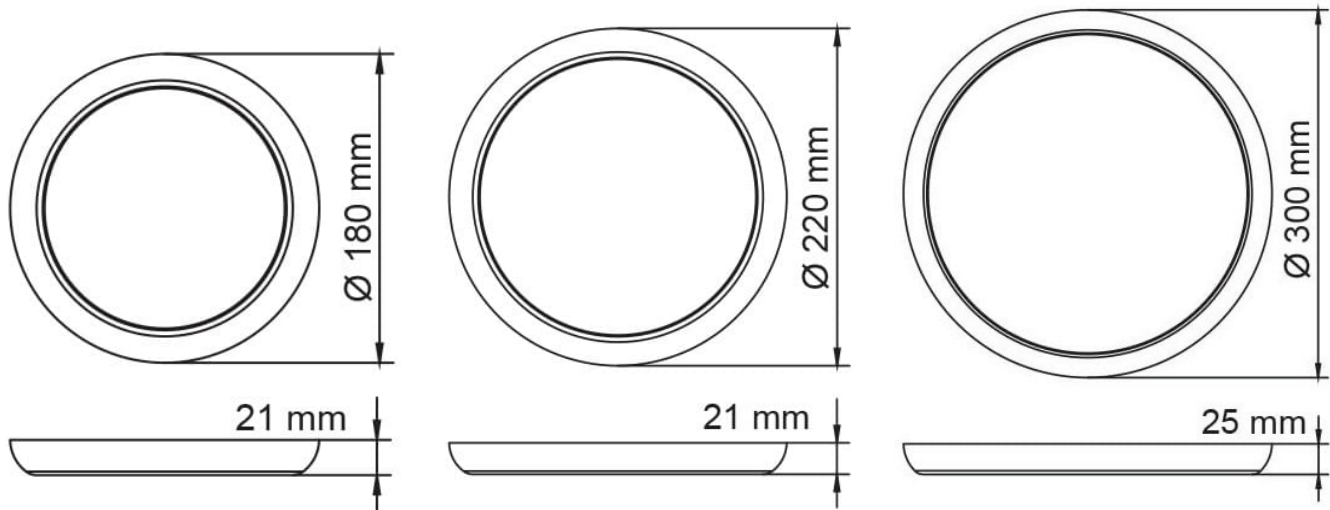

Code	Multiple Wattge (W)
SL2104/18TC/DP	8/12
SL2104/22TC/DP	12/18
SL2104/30TC/DP	18/25